

Kia Sorento (2024+)







S	Т	E	

INSTRUCTION

1

On the passenger side, remove the side panel and 2 x internal screws.



2

Repeat for the driver side.



PRODUCT DESIGN SOLUTIONS • EQUIPMENT & BRACKET DESIGN • ELECTRONIC PRODUCT DESIGN • PROTOTYPES • CAD DESIGN & ENGINEERING



3

Remove panel from behind display unit, then remove 4 x indicated screws.



4

Loosen display unit, unplug rear cables, then set display unit aside.





Remove 1 x screw, then loosen and set aside dash piece from behind steering wheel.






6

Remove 2 x screws then loosen dash piece. Unplug rear cables, then set dash piece aside.



7

Remove 4 x indicated screws, then remove lower dash control unit from the dash.

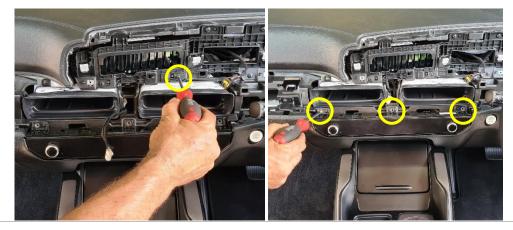

8 Using a sharp blade, carefully trim the indicated plastic tabs from the topside of the lower dash control unit.





9

10


Install first bracket as shown, returning 3 x screws.



Return dash piece and cables.



11 Use 1 x previously removed screw to fix bracket in place as shown. Then use 1 x supplied self tapper screw to drill through the plastic and secure to the mounting point behind.




PRODUCT DESIGN SOLUTIONS • EQUIPMENT & BRACKET DESIGN • ELECTRONIC PRODUCT DESIGN • PROTOTYPES • CAD DESIGN & ENGINEERING



12

Return all previously removed components to their original state.

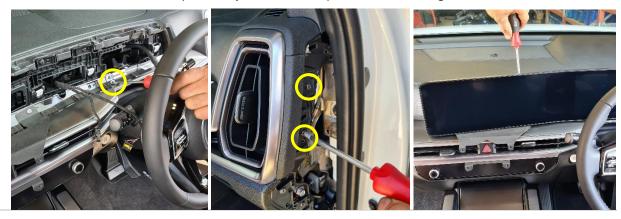

13

Install front bracket using 4 x countersuck screws provided.



Enjoy your new InDash Mount!

If you have any issues or questions, please contact us.